NOTES :

FOR SPE PLEASE REFER TO NAUTILUS MINERAL DWG. NO. SL01-NMN-PSV-DWG-7015-003

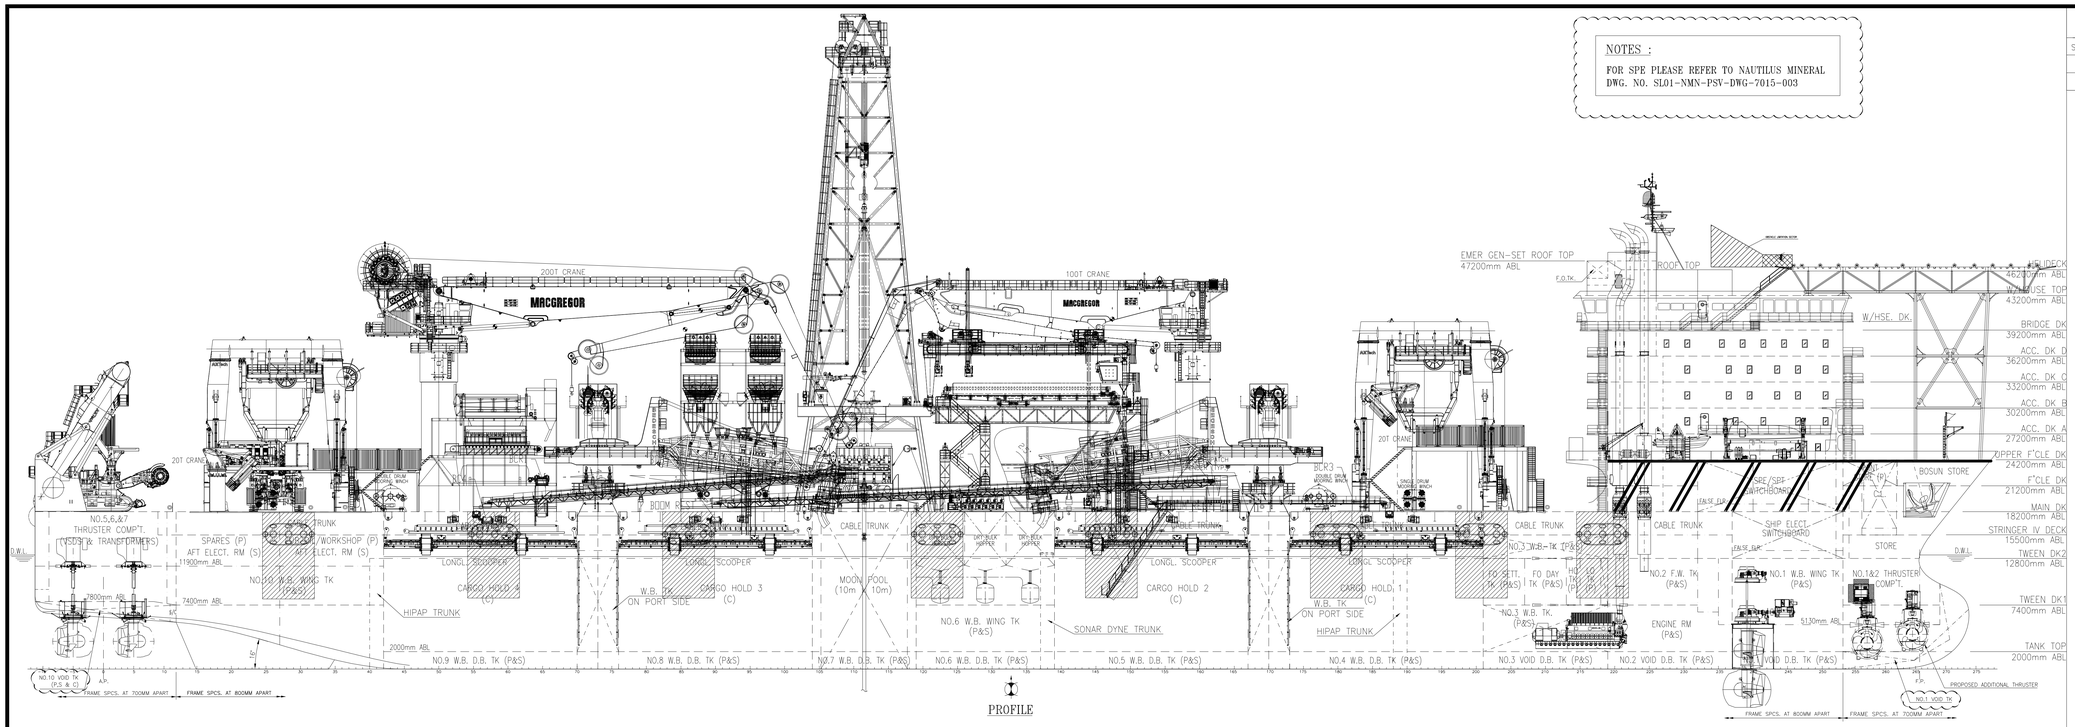

PROFILE

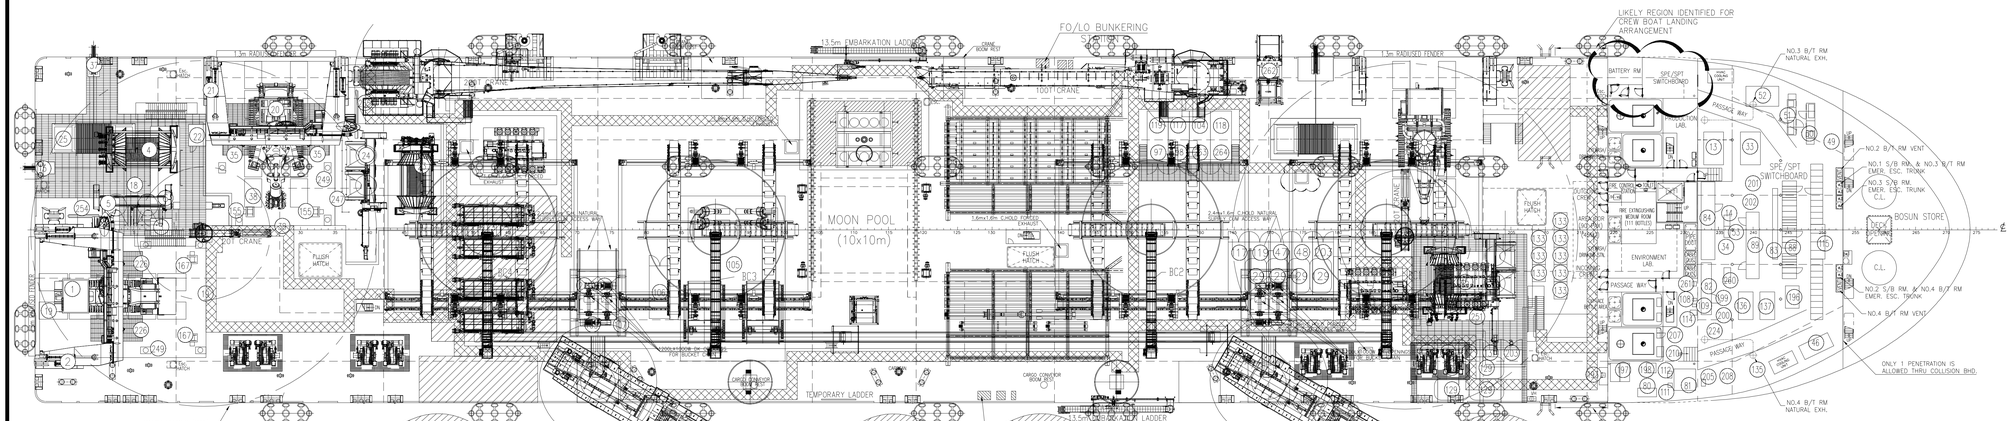

MAIN DECK PLAN (18200mm ABL)

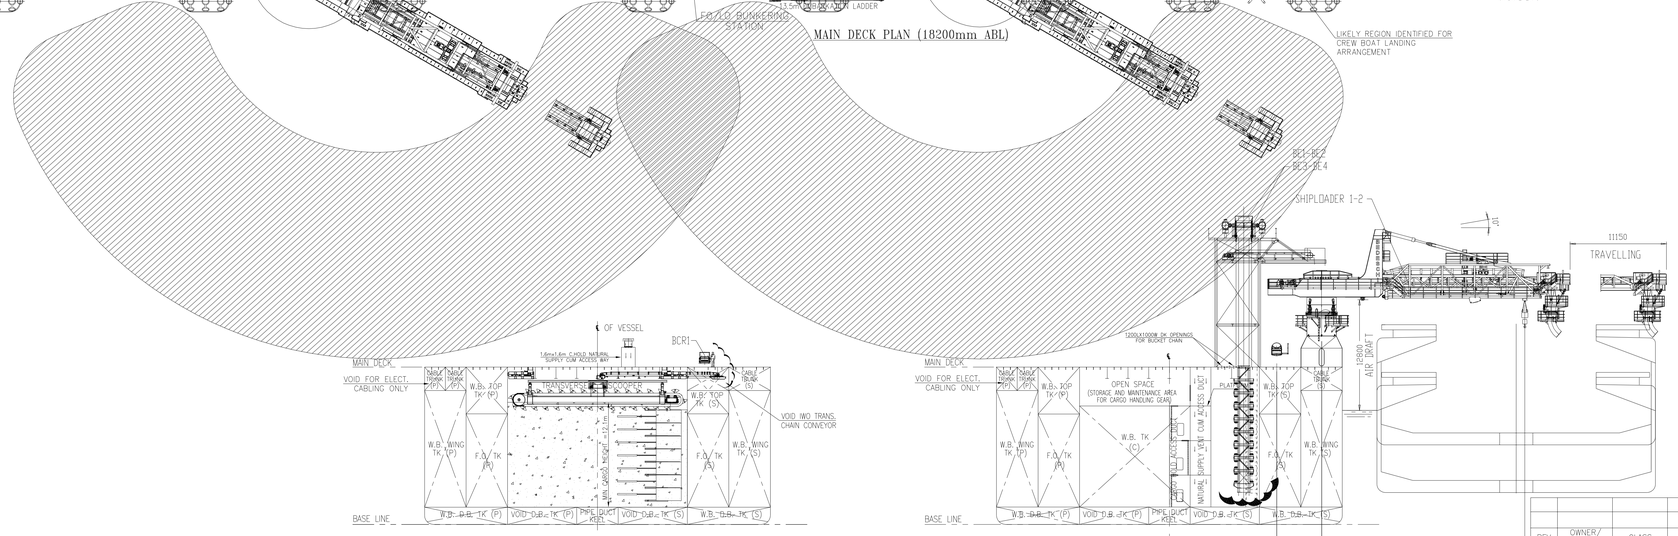

SECTION IWO CARGO HOLD (LOOKING FWD)

SECTION IWO BUCKET ELEVATOR (LOOKING FWD)

REV	OWNER/ CLIENT	CLASS	YARD	APPROVED/ REVIEWED

REFERENCE DRAWINGS

S.NO.	DESCRIPTION	DWG. NUMBER
1.	GENERAL ARRANGEMENT (HULL LAYOUT)	P2463-101-02
2.	GENERAL ARRANGEMENT (ACCOMMODATION)	P2463-101-03

NOTES :

ITEMS MARKED IN CIRCLE, REFER TO SPE GA AND BEDESCHI GA.
CHS DROP POINT WILL SHIFT 250MM REFER TO UPDATED BEDESCHI DRAWING.

PRINCIPAL DIMENSIONS

LENGTH O.A	227.00 M (ABT.)
LENGTH B.P	210.00 M
BREADTH MLD.	40.00 M
DEPTH MLD.	18.20 M
DESIGN DRAFT	13.20 M
SCANTLING DRAFT	13.20 M
ORE STORAGE CAPACITY	45,000T APPROX.
SPEED @ 100% MCR @ DRAFT 9.2M	12 KNOTS
COMPLEMENT	199 MEN
SHIP CREW	30 MEN
SPECIAL PERSONNEL (e.g. SEABED PRODUCTION CREW)	169 MEN

CLASS : ABS

+1 A1 Ⓔ OFFSHORE SUPPORT VESSEL SPS, MLC-ACCOM, HAB++ (WB), HELIDK (with Certificate of Compliance in respect of UKOOA CAP 437, NORSOK C-004 standards) , CPS, HDC (Exposed Main Deck, 10 t/m2), + AMS, + ACCU, DPS - 2 EHS - F, UWILD, NBLES

REV	MODIFICATION	BY	DATE
A11	GENERAL REVISIONS AND INCORPORATED CLASS COMMENTS.	RON	23.03.16
A10	GENERAL REVISIONS.	RON	07.05.15
A9	GENERAL REVISIONS.	RON	21.04.15
A8	SHIFTED PAINT STORE TO FWD AT FORECASTLE DECK AND ADD SPE EQUIPMENT ETC.	RON	20.04.15
A7	AMENDED AS PER OWNER COMMENTS DATED 26.03.2015.	RON	30.03.15
A6	AMENDED AS PER DESIGN PROGRESS.	RON	16.03.15
A5	CHANGE TO 3 ENGINE ROOM CONFIGURATIONS & 2 TUNNEL THRUSTERS COMP'T. AT FWD.	RON	05.12.14

OWNER: TBD

BUILDER: FUJIAN MAWEI SHIPBUILDING LTD.

HULL NO.: MW 301-1

TITLE: OFFSHORE CONSTRUCTION VESSEL

GENERAL ARRANGEMENT

DATE : 18.09.12	SCALE : 1:250	SIZE : A0
DRAWN BY : IM	PROJECT NO : P-2463	
CHECKED BY : PSC	DRG NO : P2463-101-01	
APPROVED BY : DGS	REV NO : A11	
	NM DRG NO : SL01-NMN-XSS-DWG-3010-003	