

DP-2 DIVE SUPPORT & CONSTRUCTION MULTI-PURPOSE VESSEL

A versatile, multipurpose Dive/ ROV support vessel, which is suitable for survey, IRM and light to medium construction projects. With its state-of-the-art dynamic positioning (DP) system, a reference suite which is second to none and excellent sea-keeping characteristics, the vessel is ideal for offshore subsea SAT/ Air dive support and construction scopes of work.



VESSEL HIGHLIGHTS

- ▲ State of the art DP, power management and reference suites.
- ▲ Accommodation for 112 personnel plus divers in saturation.
- ▲ Offshore 75 Ton telescopic crane and an offshore 30 Ton telescopic crane.
- ▲ 650 m² clear deck area.
- ▲ Optimised Sonardyne Ranger 2-Pro (6G) USBL system.
- ▲ V-Sat voice, data communications, capable of expansion to meet client demand.
- ▲ Fresh water generation capacity of 40 Tons/day.
- ▲ Satellite TV; telephone; internet connection in every cabin (internet connection subject to bandwidth availability).

VESSEL SPECIFICATIONS

PRINCIPLE PARTICULARS

Year Built: 2005
 Builder: ABG Yard
 Class: ABS+A1 (E)+AMS+DP-II+
 "Special Offshore Diving
 Support/Construction Vessel"
 Flag: Panama
 Call Sign: TBD
 IMO Number: TBD

DIMENSIONS

Length Overall: 83.5 m
 Breadth Moulded: 18.2 m
 Depth, Main Deck: 8.0 m
 Design Draft: 5.25 m
 GRT: 4,010 Tons
 NRT: 1,200 Tons

CAPACITIES

Fuel Oil: 1,025 m³
 Potable Water: 610 m³
 Ballast Water: 1,212 m³
 Fresh Water Generators: 2 x 40 Ton/day
 Lube Oil: 24 m³
 Hydraulic Oil: 9.9 m³
 Sewage Tank: 29.6 m³
 Oil Bilge Tank: 10.4 m³
 Deck Cargo: 750 Tons
 Clear Deck Area: 650 m², w/o mezzanine
 Open Deck Strength: 10 Ton/m²
 Incinerator: 1 x Detagasa, Delta IR10,
 Capacity 100,000 Kcal/hr
 Cement: 4 x 50 Tons Silos, Discharge Rate 25 m³/hr
 at 55 m Head

PERFORMANCE

Maximum Speed: 12 Knots
 Economical Speed: 10 Knots
 Endurance: 45 Days
 Fuel Consumption: Econ. Speed 17 Tonnes.
 Aver. Speed 10 Tonnes (DP)

MACHINERY

Main Engines: 5 x Wartsila 9L20C Diesel
 Electric Gen 1,862 kVA,
 690 Volts, 3 Phase, 60 Hz
 Propulsion: 2 x 2,000 kW Rolls Royce
 (Ulstein Aquamaster US 255) FPP
 Bow Thrusters: 3 x 700kW, Rolls Royce TT1650 DPD CP
 Emergency Generator: Caterpillar 3408C, 365 kW, 3 Phase,
 440 Volts, 60 Hz

DYNAMIC POSITIONING

Sensors: 3 x Gyrocompasses
 2 x Anemometers.
 3 x Vertical Reference units
 Make: Convertean ADP Duplex DP System, w. C-Series
 Control Modes: Joystick Manual Heading, Joystick Auto
 Heading, DP, DP minimum power,
 ROV Follow, Auto Track, Auto Sail

References: Kongsberg Seatex DPS700 (DGPS / GLONASS)
 1 x Radscan References
 2 x Cyscan Laser References
 1 x Optimised Sonardyne Ranger2-Pro (6G)
 USBL
 1 x Sonardyne Ranger2-Pro (6G) USBL.
 2 x Taut wires

DECK MACHINERY

Anchor Windlass: Plimsoll Hydraulic Driven, Double Gypsies,
 Double Warp Drums
 Anchors: 3 x 3,060 Kg Stockless Bower Type
 (one spare)
 Capstans: 2 x Vertical Type Capstans, 100/50 Kn
 pull 10/20 m/min
 Deck Air: 600 cfm @ 7 Bars

DECK CRANE

Main Crane: National Oilwell, 75 Tons
 Capacity: 75 Tons @ 9 m, 40 Tons @ 16 m, 15 Tons @ 32 m
 Heave Compensation up to 20 Tons
 Man Riding Certified
 Auxillary Crane: MCT, 30 Tons
 Capacity: 30 Tons @ 12 m, 15 Tons @ 24m,
 Aux. Hoist: 3 Tons @ 25 m/1 Ton in Main Riding Mode

HELICDECK

Designed to CAP 437 and Suitable for Sikorsky S61, TSS Helideck
 Monitoring System

LIFE SAVING APPLIANCE

In compliance with SOLAS 1974

MOONPOOL

4 m x 4 m - aerated

SATURATION DIVING SYSTEM

ABS Classed Saturation Diving System,
 12 Man Saturation Diving System, comprising of 3 living chambers (DDC)
 3 Man Diving Bell
 Design Working Depth of 200MSW
 12 Man Self-Propelled Hyperbaric Lifeboat (SPhL)


AIR DIVING SYSTEM

Design Working Depth of 50MSW
 2 x LARS with 2 man diving basket
 2 x 60 inches DDC's
 3 x HP Compressors
 8 x Kelly Tubes
 1 x SRP
 1 x Work boat

ACCOMMODATION

Total Capacity: 112 + Divers in Saturation
 Single Berth Cabins: 12
 Double Berth Cabins: 15
 Four Berth Cabins: 20
 Offices: 7
 Medical Room: 1, with 2 beds
 Conference Rooms, Gymnasium and
 Recreation Room

VESSEL LAYOUT

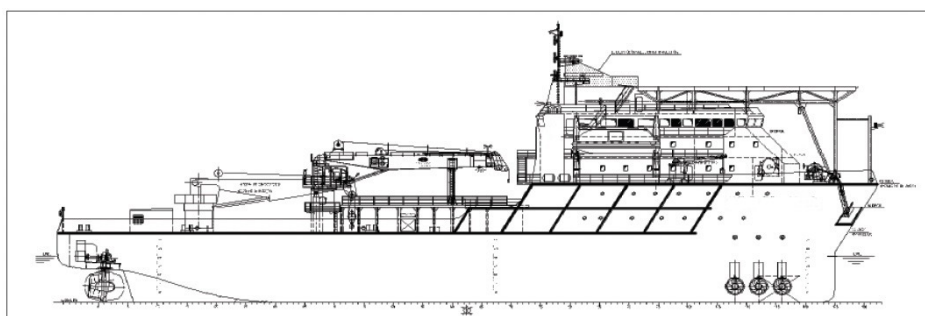

Note: The technical specifications presented within this document are subject to change without prior notification. The information presented within this document are believed to be correct, but no guarantees of accuracy can be given.