

HOS#407 | 2009 | 30m | FiFi 1 | 70T BP | ASD Tug For Private Sale



PRINCIPAL PARTICULARS

| | |
|------------|----------------------------------------------------------------------------------------|
| Year built | : 2009 |
| Builder | : TBD |
| Class | : Lloyd's Register of Shipping LRS + 100A1 Tug, + LMC, UMS, Unrestricted voyages |

PERFORMANCE DATA

| | |
|--------------|---------------|
| Max speed | : 13.0 knots |
| Bollard pull | : 70.0 tonnes |

TANK CAPACITIES

| | |
|------------|------------------------|
| Fuel oil | : 140.6 m ³ |
| Freshwater | : 26.0 m ³ |
| Dispersant | : 3.0 m ³ |
| Foam | : 3.0 m ³ |

DIMENSIONS

| | |
|--------------------|-----------|
| Length overall | : 30.00 m |
| Breath moulded | : 12.00 m |
| Depth moulded | : 5.00 m |
| Navigational draft | : 5.33 m |
| Gross tonnage | : 394 |
| Net tonnage | : 118 |

TOWING AND DECK EQUIPMENT

| | |
|-------------------|-------------------------------------------------------------------|
| Tow winch | : Plimsoll PC-HTW/SD-10/175 |
| Brake holding | : 175 tonnes |
| Line pull | : 10.0MT at 10m/min (low speed) 2.0MT at 40m/min (slack speed) |
| Anchor winch pull | : 2 x Plimsoll PC-HNW/SD-03/019 (sited at stern) 3T @ 10m/min |
| Deck crane | : Hiab 121-1 SWL 1.8T @ 7.4m radius |

MACHINERY

| | |
|--------------|-----------------------------------------------|
| Main engines | : 2 x 1999kW Cat 3516B @ 1600rpm |
| Generators | : 2 x 138.8kW Perkins 6TWGM @ 1500rpm |
| Propellers | : Twin screw Fixed pitch - Schottel SRP1515FP |

RADIO AND NAVIGATIONAL EQUIPMENT


| | |
|------------------|------------------------------------|
| Radar | : Furuno FR-1942 MARK 2 |
| SSB transceiver | : Furuno FS-1570 |
| VHF | : Motorola GM 338, Furuno FM-8800S |
| Echo sounder | : Furuno FCV-620 |
| Immarsat C | : Felcom 15 |
| Navtex | : Furuno NX-700B |
| EPIRB | : McMurdo E5 |
| Talkback system | : SEA 857 |
| Magnetic compass | : Saura T-150 IIF |
| Auto pilot | : Raytheon NP 60 |
| AIS | : Furuno FA-150 |

ACCOMMODATION (FULLY AIR-CONDITIONED)

| | |
|---------------|---------------------------------|
| Officers | : 2 x 1 berth |
| Crew | : 2 x 3 berths and 1 x 2 berths |
| Total | : 10 berths |
| Sewage system | : Taiko Kikai SBT-15 |

FIRE-FIGHTING / ANTI-POLLUTION EQUIPMENT

| | |
|---------------|--------------------------------------------------------------------------------------|
| FiFi pump | : 1 x APS SFP 250x350 of cap 1400m ³ /hr @ 125m head c/w water curtain |
| FiFi monitor: | : 2 x FFS1200 dual purpose foam/water 600m ³ /hr |

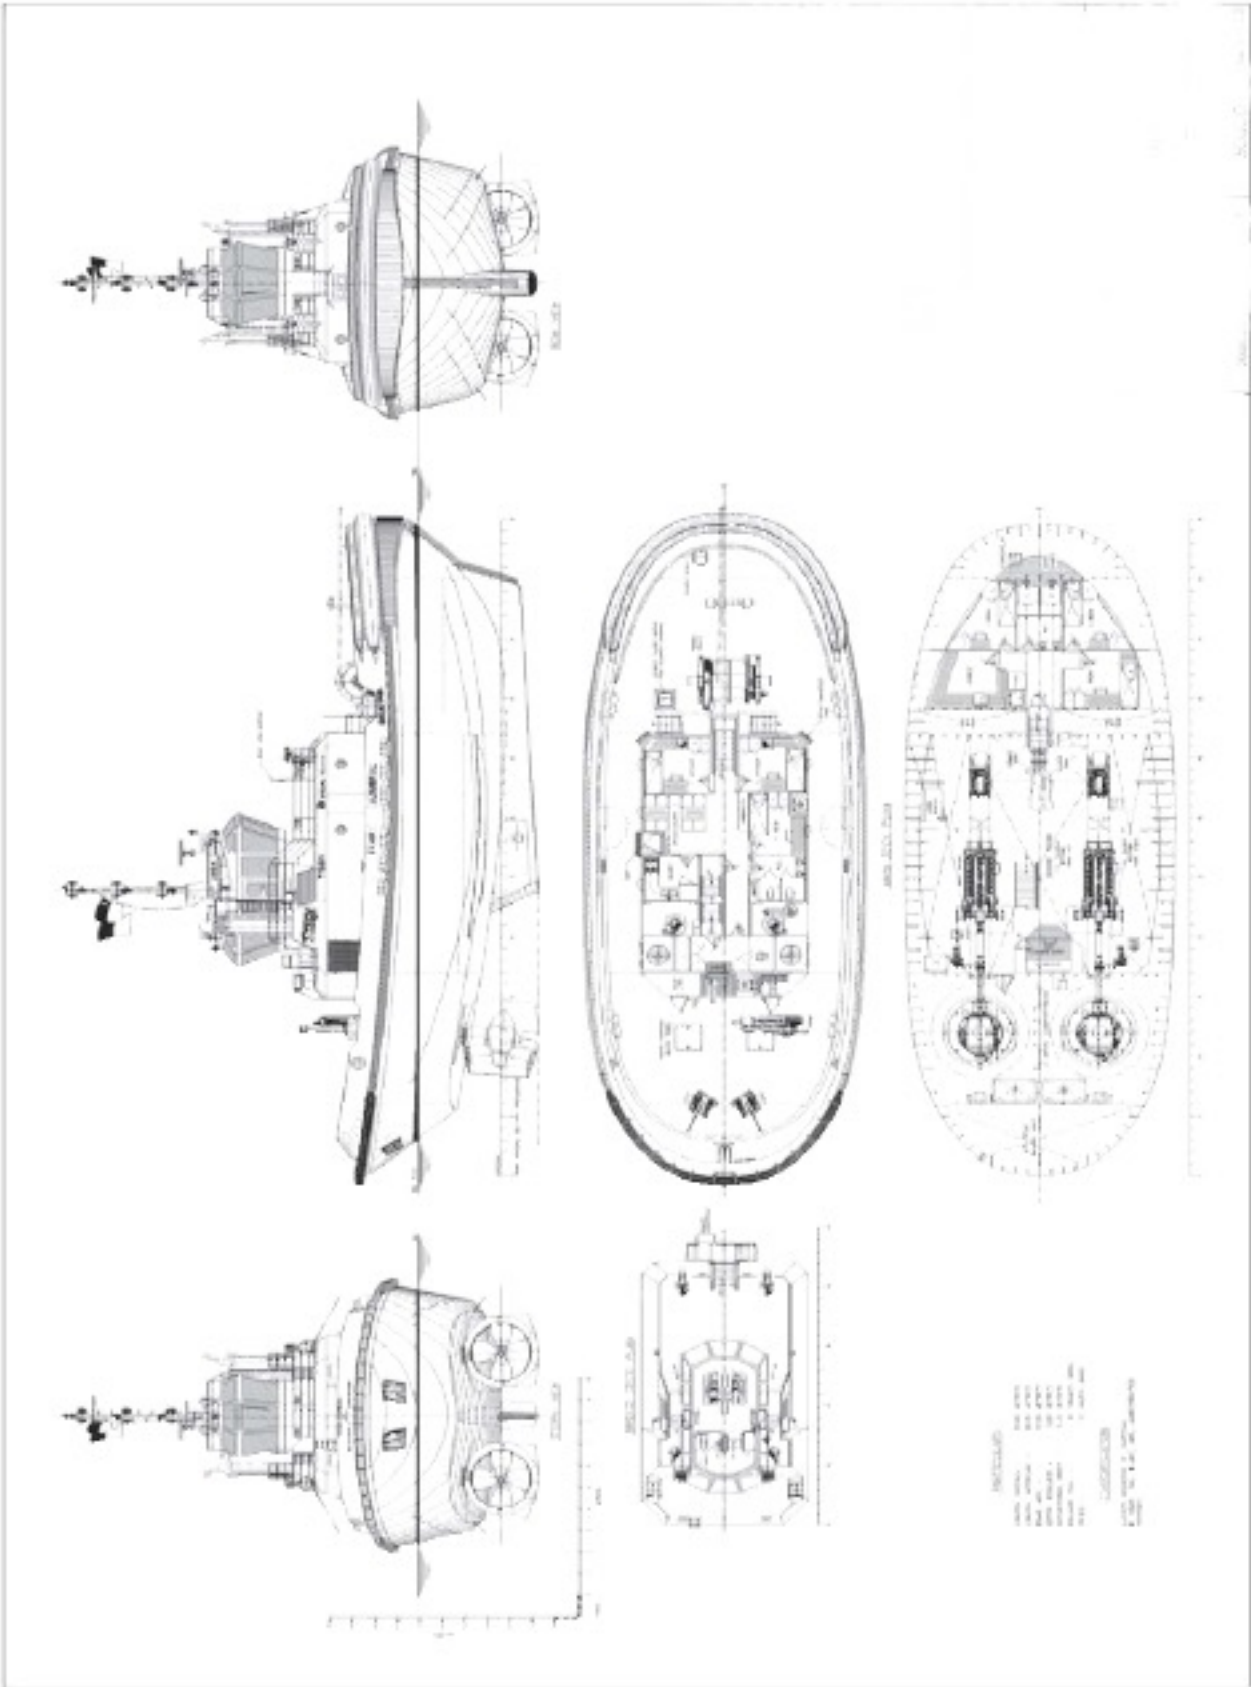

Note: The information and sketches in this document are given in good faith without any express, implied or statutory warranty or condition.